

# AQUALISA


## AQUARIAN™ THERMO EXPOSED MIXER SHOWER

E99.01T



CHROME

.....  
DIMENSIONAL DRAWINGS

ADJUSTABLE HEAD

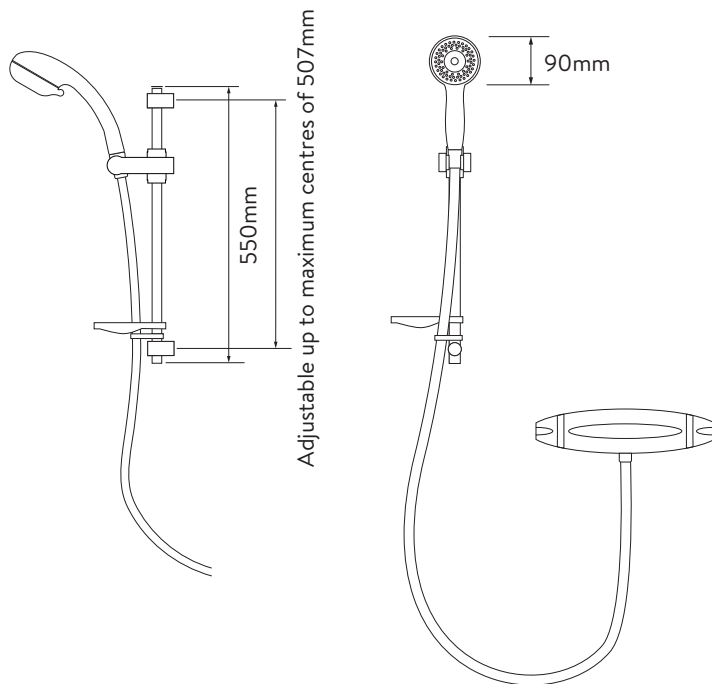

FIXED HEAD

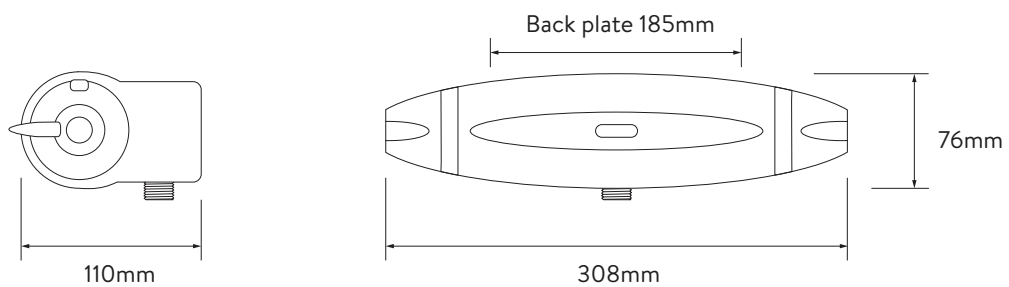

# AQUALISA

## AQUARIAN™ THERMO EXPOSED MIXER SHOWER

E99.01T

CHROME

---

### TECHNICAL SPECIFICATIONS

|                               |                                                            |
|-------------------------------|------------------------------------------------------------|
| Minimum pressure requirements | 0.1 bar                                                    |
| Maximum pressure requirements | 10 bar                                                     |
| Inlet fitting connections     | 15mm Push Fit                                              |
| Inlet supply positions        | Hot/left, cold/right                                       |
| Outlet connections            | 1/2" BSP                                                   |
| Valve inlet centres           | 150mm                                                      |
| Supply temperature            | 5 - 20°C Cold Supply                                       |
|                               | 55 - 65°C Hot Supply                                       |
| Water system                  | Gravity, Boosted Gravity, Combi and Balanced High Pressure |
| Features                      | East clean nozzles                                         |
|                               | Rotating spray selector                                    |
|                               | Pinch grip slider                                          |
|                               | Hose restraint                                             |
|                               | On/off control                                             |
|                               | Temperature override                                       |
|                               | Temperature control                                        |
| Colour                        | Chrome                                                     |
| Guarantee period              | 3 years                                                    |